

Water Analysis

NANOCOLOR® VARIO HC

NEW



Heating block with cooling system

NANOCOLOR® VARIO HC

- Active rapid cooling after the heating process
- Electronic safety locks
- Touch screen with intuitive user guidance
- High-speed digestions in 30 minutes

MACHEREY-NAGEL


www.mn-net.com




Since 1911

NANOCOLOR® VARIO HC

The all-rounder

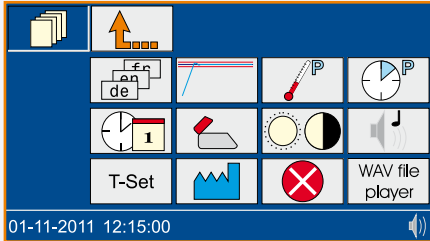

Self-explanatory user guidance

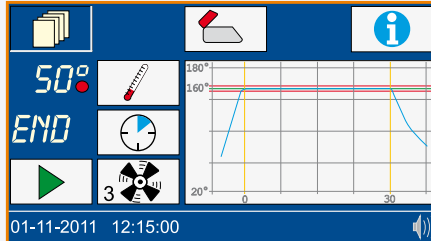

Temperature curve chart

Set	Block	T-Set	Delta T
70°	70.0°	70.0°	0.0°
100°	100.0°	100.0°	0.3°
120°	120.0°	120.0°	0.4°
148°	148.0°	148.2°	0.2°
160°	160.0°	159.9°	-0.1°
...			
...			
...			
...			
...			

Date:	Slope	Intercept
2011-11-01	0.9992	0.24
T-Set ID: NT0449h	Correction: 0.9992	0.24
	Old Calibration: 1.0000	0.00

Internal quality control

Technical data

Type:	Heating block NANOCOLOR® VARIO HC – with cooling system – 12 holes for test tubes with 16 mm OD (outer diameter) and aerator
Display:	Colored, backlit LCD touch screen
Temperatures:	5 preprogrammed temperatures: 70 / 100 / 120 / 148 / 160 °C 7 free memory locations for individual temperature settings
Temperature range:	40–160 °C (1 °C increments)
Temperature stability:	± 1 °C (according to DIN, EN, ISO and EPA methods)
Warm-up time:	From 20 °C to 160 °C within 10 minutes
Heating times:	4 preprogrammed heating times: 30 min / 60 min / 120 min / cont. 8 free memory locations for individual heating times
Time range:	0h:01min–9h:59min (increments 0h:01min)
Cooling time:	From 160 °C to 50 °C within 10 minutes
Fan speed:	3 steps (low, medium, high)
Fan off:	Between 20–150 °C
Safety:	Replaceable safety covers as contact protection Lockable protective lids Overheating protection
Interfaces:	Bidirectional serial RS 232, USB A (master) and USB B (slave)
Analytical quality control:	With NANOCOLOR® T-Set (REF 919 917) fully automatic calibration and test certificate generation
Update:	Via internet and USB stick
Power supply:	110–230 V ~, 50/60 Hz
Power consumption:	150 / 550 VA
Dimensions (W x D x H):	290 x 287 x 146 mm
Weight:	ca. 3.2 kg

 These instruments conform to the following directives:
- 2006/95/EC – Low-Voltage Directive
- 004/108/EC - EMV Directive

Ordering information

NANOCOLOR® VARIO HC REF 919 330

12 holes for test tubes with 16 mm OD and aerator, incl. mains cable, protective lid, manual, data cable and software-DVD

NANOCOLOR® T-Set REF 919 917

Electronic temperature sensor incl. software-DVD, certificate and manual

www.mn-net.com

Your local distributor

MACHEREY-NAGEL



MACHEREY-NAGEL GmbH & Co. KG · Neumann-Neander-Str. 6–8 · 52355 Düren · Germany

Germany and international:
Tel.: +49 24 21 969-0
Fax: +49 24 21 969-199
E-mail: info@mn-net.com

Switzerland:
MACHEREY-NAGEL AG
Tel.: +41 62 388 55 00
Fax: +41 62 388 55 05
E-mail: sales-ch@mn-net.com

France:
MACHEREY-NAGEL EUROL
Tel.: +33 388 68 22 68
Fax: +33 388 51 76 88
E-mail: sales-fr@mn-net.com

