

KERN FCB 30K-4



The new FCB: Checkweighing and portioning scale with up to three interfaces



Category

Brand	KERN
Product category	Industrial scale
Product group	Bench scale
Product family	FCB

Measuring System

Construction type of the scale	Single-range balance
Weighing system	Strain gauge
Weighing capacity [Max]	30 kg
Readability [d]	0,0002 kg
Reproducibility	0,0002 kg
Linearity	± 0,0006 kg
Resolution	150.000
Adjustment options	Adjusting with external weight
Recommended adjusting weight	20 kg (F1); 10 kg (F1)
Possible calibration points	10 kg; 20 kg; 30 kg
Stabilization time	2 s
Warm-up time	120 min
Eccentric loading at 1/3 [Max]	0,001 kg
Maximum creep (15 minutes)	2 g
Maximum creep (30 minutes)	4 g
Default unit	kg
Units	kg
	g
	gn
	dwt
	ozt
	ct
	lb
	oz
ffa	

	PCS %
Loadcell type	aluminium IP65 silicone-coated

Display

Display type	LCD
Display backlight	✓
Display screen size	120×38 mm
Display digit height	25 mm
Languages of the user interface	English Symbol language

Construction

Dimension housing (W×D×H)	322×267×91 mm
Dimensions completely mounted (W×D×H)	325×270×105 mm
Dimensions weighing surface (W×D)	252×225 mm
Dimensions weighing surface	252×225 mm
Material housing	plastic
Material weighing plate	stainless steel
Material display housing	Plastics
Material load cell(s)	aluminium
Level indicator	✓
Levelling feet adjustable	✓
Transport safety lock - bolt torque	0,4 Nm

Functions

Sum memory function	✓
Recipe/summing level	Sum A
Percentage determination	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Underfloor weighing	None
Function for averaging under unstable weighing conditions	✓
Counting function	✓
Counting resolution (laboratory conditions)	150.000
Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	200 mg
Smallest piece weight when piece counting - normal conditions	2 g
Reference quantity	5, 10, 20, 50, free, Input
IP protection - complete device	-

KERN FCB 30K-4

The new FCB: Checkweighing and portioning scale with up to three interfaces

IP protection - display	no IP protection
IP protection - load cell	IP65
Auto-off interval(s) in battery mode/rechargeable battery mode	2 min
	1 min
	30 min
	60 min
	30 sec
Tare function	manual (multi)
Number of keys for operation	6

Interface	
Interfaces	RS-232 (optional)
	Ethernet (optional)
	Bluetooth BLE (v4.0) (optional)
	USB-Device (optional)
	KUP
	WiFi (optional)
EasyTouch (ET) - Compatibility	vollständig
EasyTouch (ET) - Connection type	KUP

Power Supply	
Supplied power supply	Power supply unit
Plug-in power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO
	UK
	US
	CH
Plug-in power supply / adapter for countries - optional	EURO
	UK
	US
	CH
Input voltage power supply / power [Max]	100 V - 240 V AC, 50 / 60 Hz
Input voltage device / power [Max]	5,9V, 1A
Battery / accumulator type	Li-Ion
Battery operating time	20 h
Rechargeable battery operating time - backlight on	24 h
Rechargeable battery operating time - backlight off	48 h
Rechargeable battery charging time	8 h
Rechargeable battery optional	Rchrg. battery optional

Environmental conditions	
Ambient temperature [Min]	0 °C
Ambient temperature [Max]	40 °C
Humidity of environment [Min]	0 %
Humidity of environment [Max]	80 %

Storage temperature [Min]	-20 °C
Storage temperature [Max]	60 °C


Approval	
CE mark	✓

Services (optional)	
Article number for DAkkS calibration	963-128
Article number for certificate of conformity (verification)	969-517

Packing & Shipping	
Delivery time	1 d
Dimensions packaging (W×D×H)	395×335×200 mm
Net weight	3,91 kg
Shipping method	Parcel service
Net weight approx.	4,0 kg
Gross weight approx.	4,2 kg
Shipping weight	5,3 kg

Pictograms

STANDARD

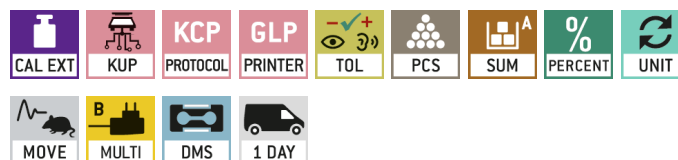

OPTION

