


KERN EWJ 600-2SM

KERN

High-quality precision balance with automatic internal adjustment, verification optional

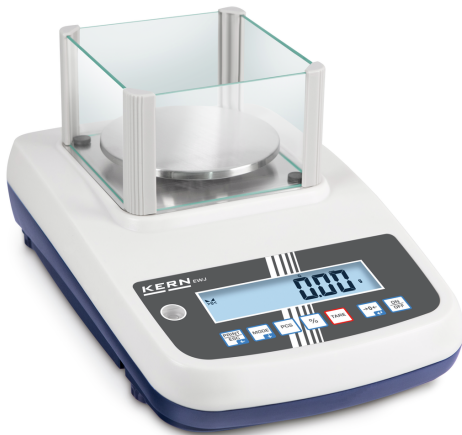

Category	
Brand	KERN
Product category	Laboratory balance
Product group	Precision balance
Product family	EWJ

Measuring System	
Construction type of the scale	Single-range balance
Weighing system	Strain gauge
Weighing capacity [Max]	600 g
Readability [d]	0,01 g
Reproducibility	0,01 g
Linearity	± 0,03 g
USP Minimum weight of sample (k = 2, U = 0.1%)	20 g
Minimum weight [Min]	0,5 g
Resolution	60.000
Tare range	599,99 g
Adjustment options	Internal calibration (automatic)
Automatic adjustment - Standard time interval	2 h
Stabilization time	2 s
Warm-up time	120 min
Eccentric loading at 1/3 [Max]	0,03 g
Default unit	g
Units	g
Units (if device is conformity assessed)	g
Conformity assessment possible	✓
Loadcell type	aluminium IP65 silicone-coated

Display	
Display type	LCD
Display backlight	✓
Display screen size	129 x 27
Display digit height	21 mm
Languages of the user interface	English Symbol language

Construction	
Dimension housing (W×D×H)	220×340×90 mm
Dimensions completely mounted (W×D×H)	220×340×180 mm
Dimensions rectangular draught shield - inner (W×D×H)	134×128×80 mm
Dimensions rectangular draught shield - outer (W×D×H)	144×139×81 mm
Dimensions weighing surface (Ø)	120 mm
Dimensions weighing surface	120 mm
Material housing	plastic
Material weighing plate	stainless steel
Material platform	Stainless steel
Material load cell(s)	aluminium
Level indicator	✓
Levelling feet adjustable	✓
Transport safety lock - bolt torque	0,1 Nm

Functions	
PreTare function	✓
Recipe/summing level	Rez A (Net total)
Percentage determination	✓
Tolerance weighing	✓
Tolerance weighing - type of signal	acoustically visual
Function for averaging under unstable weighing conditions	✓
Capacity - Display	✓
Counting function	✓
Counting resolution (laboratory conditions)	30.000
Counting reference weight can be entered	✓
Smallest piece weight when piece counting - laboratory conditions	20 mg
Smallest piece weight when piece counting - normal conditions	200 mg
Reference quantity	5, 10, 20, 50, free, Input
Hold function	✓
IP protection - display	no IP protection

KERN EWJ 600-2SM

High-quality precision balance with automatic internal adjustment, verification optional

IP protection - load cell	IP65
	5 min
	2 min
Auto-off interval(s) in battery mode/rechargeable battery mode	1 min
	30 min
	60 min
	30 sec
Tare function	manual (multi)
Number of keys for operation	7

Interface	
Interfaces	Bluetooth BTC (v2.0) (optional, factory) Bluetooth BLE (v4.0) (optional, factory)

Power Supply	
Supplied power supply	Power supply unit
Plug-in power supply type	Power adapter
Plug-in power supply / adapter for countries - included with the delivery	EURO UK US CH

Plug-in power supply / adapter for countries - optional	EURO AUS UK US CH
---	-------------------------------

Input voltage power supply / power [Max]	100 V - 240 V, 50 / 60 Hz
--	---------------------------

Input voltage device / power [Max]	12 V, 500 mA
------------------------------------	--------------

Battery / accumulator type	Pb
----------------------------	----

Battery connection	2-pole tub connector
--------------------	----------------------

Rechargeable battery operating time - backlight on	32 h
--	------

Rechargeable battery operating time - backlight off	57 h
---	------

Rechargeable battery charging time	6,5 h
------------------------------------	-------

Rechargeable battery optional	Rchrg. battery optional - intern
-------------------------------	----------------------------------

Environmental conditions	
Ambient temperature [Min]	10 °C
Ambient temperature [Max]	35 °C
Humidity of environment [Max]	80 %

Approval	
CE mark	✓

Conformity assessment possible ex works	✓
Accuracy classe	II
Verification scale interval [e]	0,1 g

Services (optional)	
Article number for conformity assessment	965-216
Article number for DAkkS calibration	963-127
Article number for certificate of conformity (verification)	969-517

Packing & Shipping	
Delivery time	1 d
Dimensions packaging (W×D×H)	410×295×275 mm
Net weight	2,8 kg
Shipping method	Parcel service
Net weight approx.	2,8 kg
Gross weight approx.	3,8 kg
Shipping weight	6,7 kg

Pictograms

STANDARD



OPTION



FACTORY

